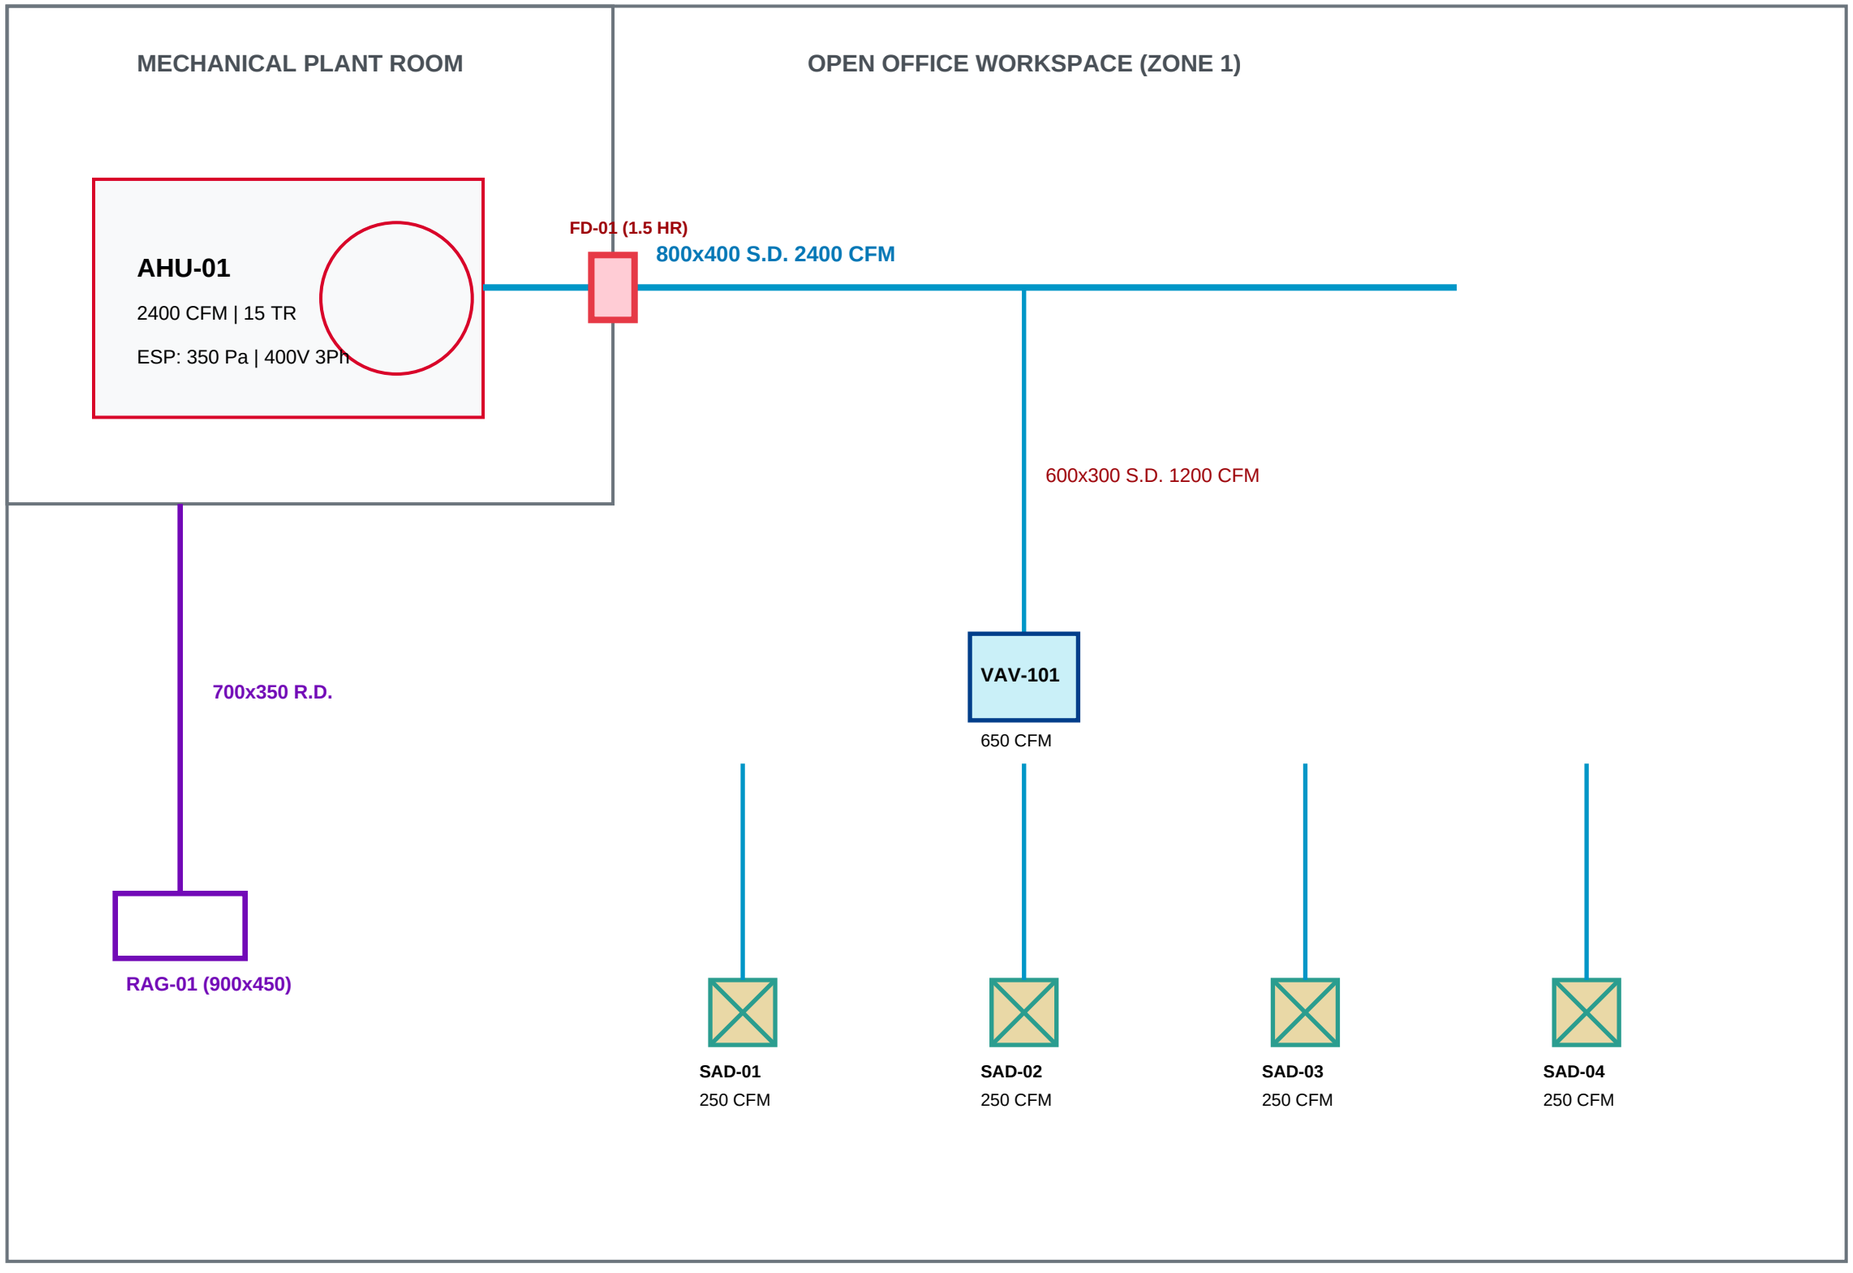

MEP DRAWING LEGEND

- SUPPLY AIR DUCT
- RETURN AIR DUCT
- 4-WAY DIFFUSER (SAD)
- FIRE DAMPER (FD)

METROPOLITAN ENGINEERING CONSULTANTS

PROJECT: COMMERCIAL TOWER COMPLEX | CLIENT: VERTEX DEVELOPMENTS

DRAWING: LEVEL 02 - HVAC DUCTWORK & EQUIPMENT DISTRIBUTION

DWG NO: M-101 | REV: C | SCALE: 1:50 | SHEET 1 OF 2

AIR HANDLING & TERMINAL UNIT SCHEDULE

TAG	EQUIPMENT DESCRIPTION	AIRFLOW (CFM)	COOLING (TR)	DIMENSIONS (MM)	ELECTRICAL	LOCATION
AHU-01	Air Handling Unit (Chilled Water Coil)	2400 CFM	15 TR	2200 x 1400 x 1200	400V / 3Ph / 50Hz, 7.5 kW	Mech Room L2
VAV-101	Pressure Independent VAV Terminal	650 CFM	N/A	850 x 500 x 300	24V AC Actuator, 10VA	Ceiling Zone 1
VAV-102	Pressure Independent VAV Terminal	550 CFM	N/A	850 x 500 x 300	24V AC Actuator, 10VA	Ceiling Zone 2
FD-01	Motorized Fire & Smoke Damper	2400 CFM	N/A	850 x 450 x 250	230V Spring Return, 15W	Mech Room Wall
SAD-01..04	4-Way Modular Supply Diffusers	250 CFM each	N/A	600 x 600 x 300 Neck	Passive	Ceiling Grid
RAG-01	Perforated Return Air Grille	2200 CFM	N/A	900 x 450	Passive	Low Wall Entry